

Technical Data Sheet

CODE 11105

MG 150/6" T LL

In-line axial fans



Certifications



IMQ



CE



IMQ Performance



EAC



G-Mark




UKCA

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,18	Weight (Kg)	0,80
Absorbed Power max (W)	29	Delivery max (l/s)	88,9
Frequency (Hz)	50	Delivery max (m ³ /h)	320
Insulation Class	II°	Pressure max (mmH ₂ O)	7,0
IP	X4	Pressure max (Pa)	69
Max ambient temperature for continuous operation (°C)	50	RPM	2200
Voltage (V)	220-240	Sound Pressure level Lp [dB (A)] 3m	48

DIMENSIONS

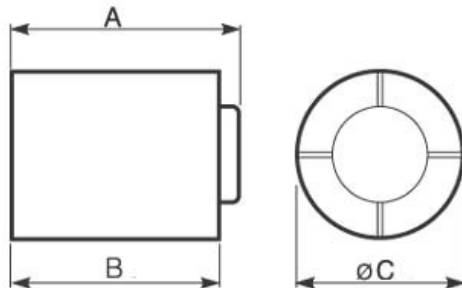

Size A (mm)	∅
	155
Size B (mm)	114,5
Size C (mm)	107

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11105

MG 150/6" T LL

In-line axial fans



DESCRIPTION


- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 320 m³/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.

ACCESSORIES



**TUBO
TELESCOPICO
D.150**

Code 22258



**STAFFA PER
SOTTOTETTO/SOFFITTO
D.150**

Code 22261

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com