

Technical Data Sheet

CODE 11110

MG 90/3,5"

In-line axial fans



Certifications



IMQ



CE



IMQ Performance




EAC

TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|------|-------------------------------------|---------|
| Absorbed Current max (A) | 0,10 | Voltage (V) | 220-240 |
| Absorbed Power max (W) | 18 | Weight (Kg) | 0,45 |
| Frequency (Hz) | 50 | Delivery max (l/s) | 18 |
| Insulation Class | II° | Delivery max (m³/h) | 65 |
| IP | X4 | Pressure max (mmH2O) | 2,1 |
| Max ambient temperature for continuous operation (°C) | 40 | Pressure max (Pa) | 21 |
| Nominal Diameter (mm) | 100 | RPM | 2450 |
| | | Sound Pressure level Lp [dB (A)] 3m | 38 |

DIMENSIONS

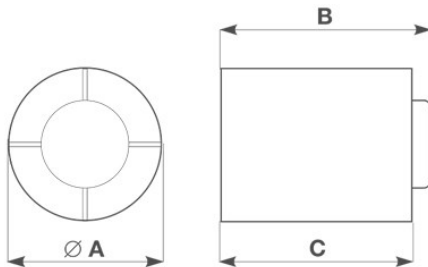

| | |
|-------------|------|
| Size A (mm) | ∅ |
| | 92,5 |
| Size B (mm) | 92 |
| Size C (mm) | 89 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11110

MG 90/3,5"


In-line axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 90 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 65 m³/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.

CURVES

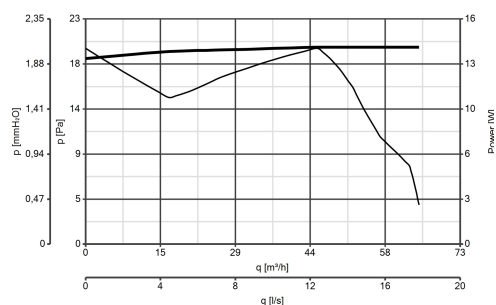

ACCESSORIES



C 1.5
(COMANDO EL.
1.5 A)

Code 12966



STAFFA PER
SOTTOTETTO/SOFFITTO
D.90/100

Code 22259



SCNRB
SCB.COM.NON
REV.INCASSO

Code 12971



KIT SCB
(TRASF.E.C.)

Code 22481

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com