

Technical Data Sheet

CODE 11129

MF 150/6" T

Wall axial fans



IMQ



IMQ Performance



CCC



EAC





G-Mark

TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|------|-------------------------------------|---------|
| Absorbed Current max (A) | 0,15 | Voltage (V) | 220-240 |
| Absorbed Power max (W) | 28 | Weight (Kg) | 0,97 |
| Frequency (Hz) | 50 | Delivery max (l/s) | 93 |
| Insulation Class | II° | Delivery max (m³/h) | 335 |
| IP | X4 | Pressure max (mmH2O) | 6 |
| Max ambient temperature for continuous operation (°C) | 50 | Pressure max (Pa) | 59 |
| Nominal Diameter (mm) | 160 | RPM | 2100 |
| Ø Discharge Hole (mm) | 156 | Sound Pressure level Lp [dB (A)] 3m | 40,1 |

DIMENSIONS

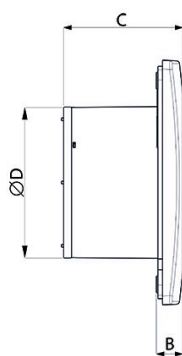

| | |
|-------------|-----|
| Size A (mm) | 214 |
| Size B (mm) | 17 |
| Size C (mm) | 96 |
| Size D (mm) | 156 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11129

MF 150/6" T


Wall axial fans




DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- Vortice speed controller.

CURVES

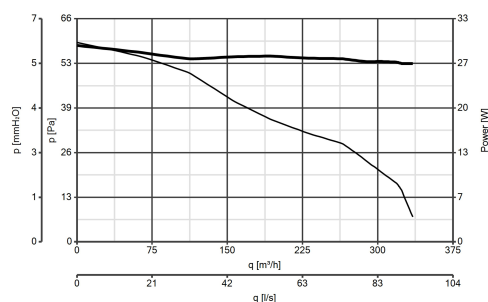

ACCESSORIES



SF 150

Code 22164

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com