

Technical Data Sheet

CODE 11201

M 100/4"

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



CCC



EAC



G-Mark




UKCA

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,1	Ø Discharge Hole (mm)	99
Absorbed Power max (W)	18	Voltage (V)	220-240
Frequency (Hz)	50	Weight (Kg)	0,6
Insulation Class	II°	Delivery max (l/s)	25
IP	X4	Delivery max (m³/h)	90
Max ambient temperature for continuous operation (°C)	50	Pressure max (mmH2O)	3
Max. absorbed power at max speed (W)	18	Pressure max (Pa)	29
Nominal Diameter (mm)	100	RPM	2300
		Sound Pressure level Lp [dB (A)] 3m	37,5

DIMENSIONS

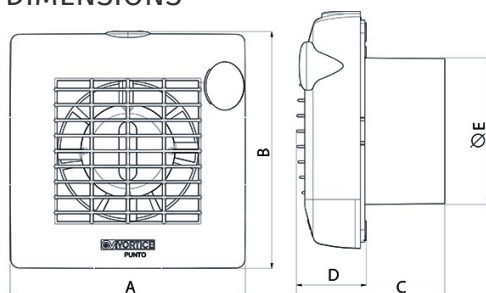

Size A (mm)	159
Size B (mm)	160
Size C (mm)	100
Size D (mm)	47
Size E (mm)	Ø 99

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11201

M 100/4"

Wall/window axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 90 m³/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller.

ACCESSORIES



C 1.5
(COMANDO EL.
1.5 A)

Code 12966



SCNRB
SCAT.COM.NON
REV.INCASSO

Code 12971



KIT SCB
(TRASF.E.C.)

Code 22481



S 100/4

Code 22154



F 100/4"

Code 22131



IRM 30

Code 12921

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com